


Stereo applications using the SubCast System

Application diagram


SUBCAST-S#1

Using the SubCast System and 2 Powered Speakers

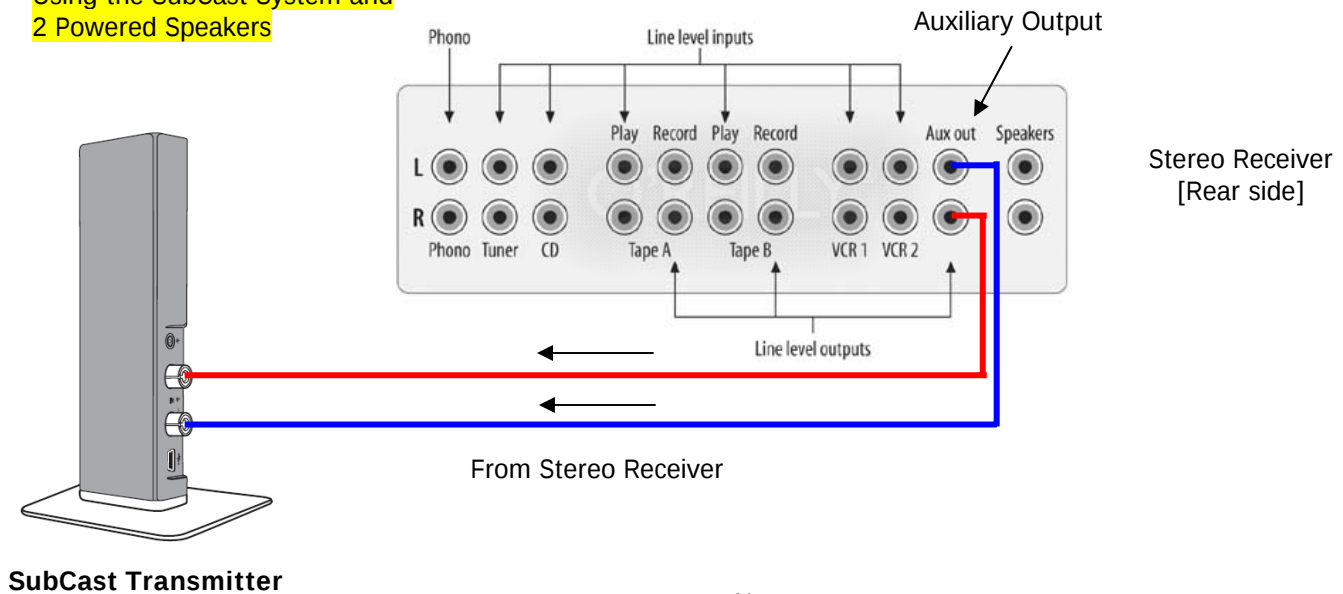

Note:

2 Stereo RCA cables are
provided with product

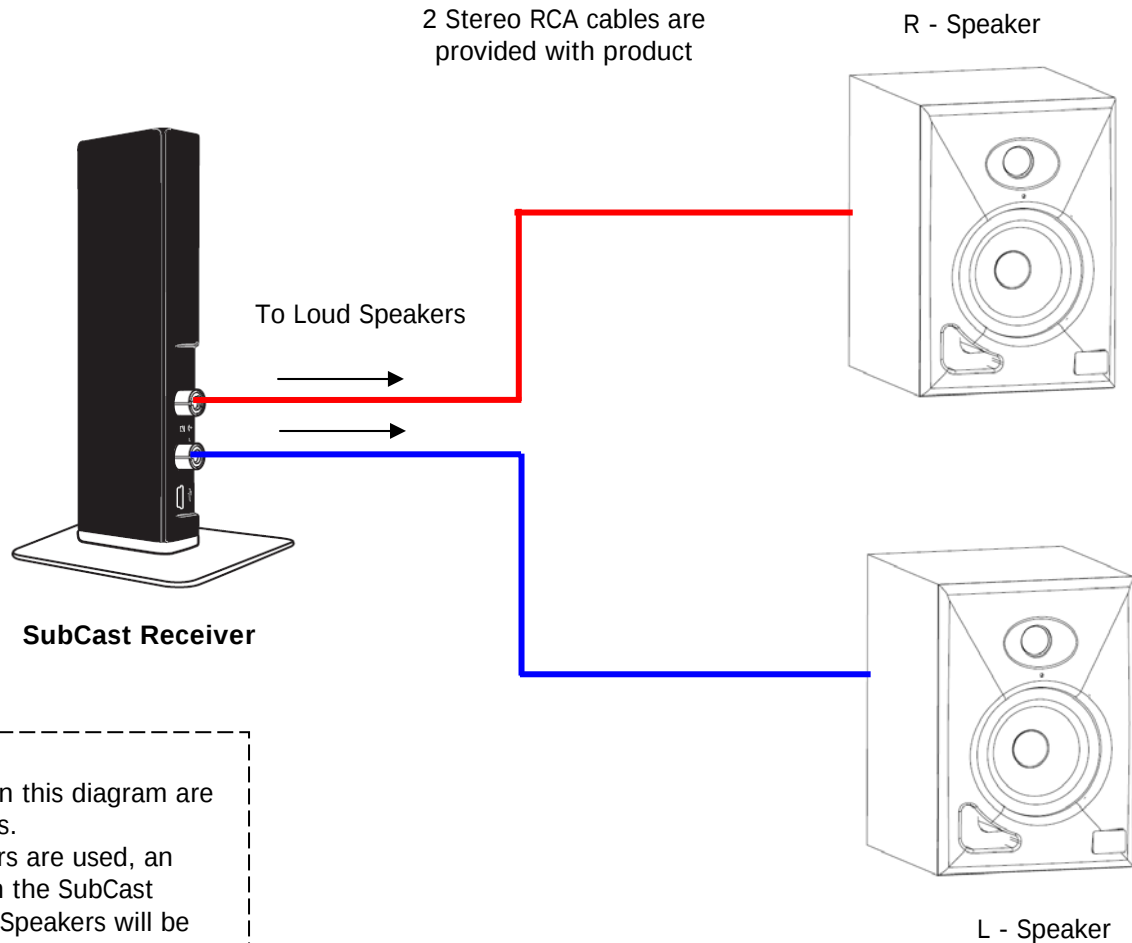


Note:
Speakers shown in this diagram are
Powered Speakers.
If passive speakers are used, an
amplifier between the SubCast
Receiver and the Speakers will be
required.

* Drawing is not to scale

Stereo applications using the SubCast System

Application diagram SUBCAST-S#2


Using the SubCast System with
an amplifier and 2 passive
speakers at the receiver end.

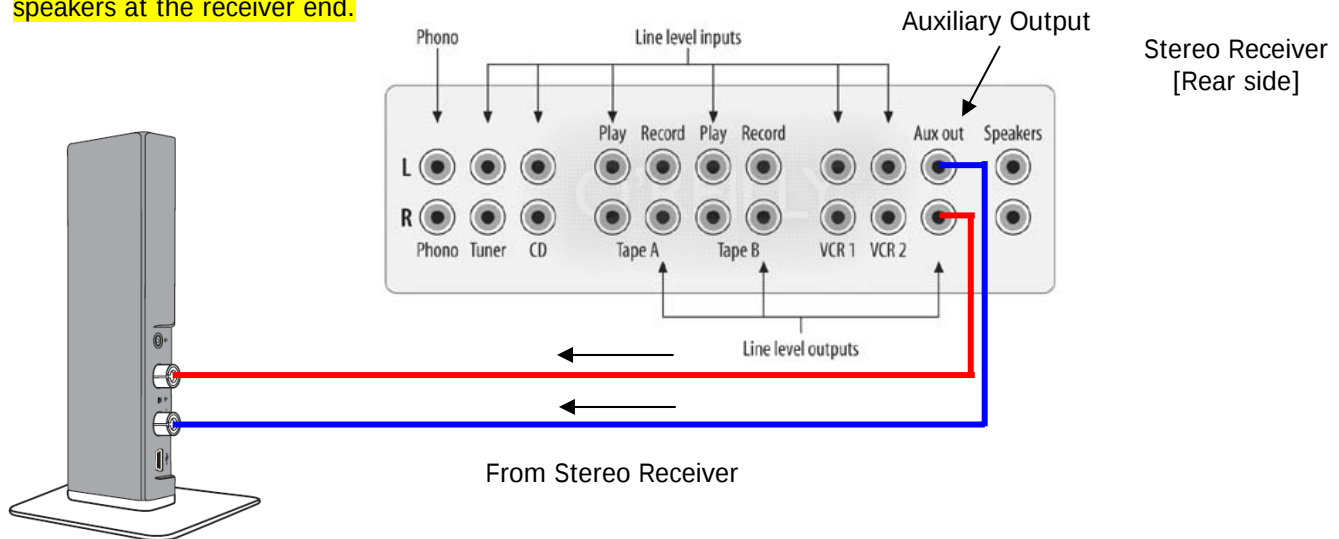

SubCast Transmitter

Note:

2 Stereo RCA cables are
provided with product

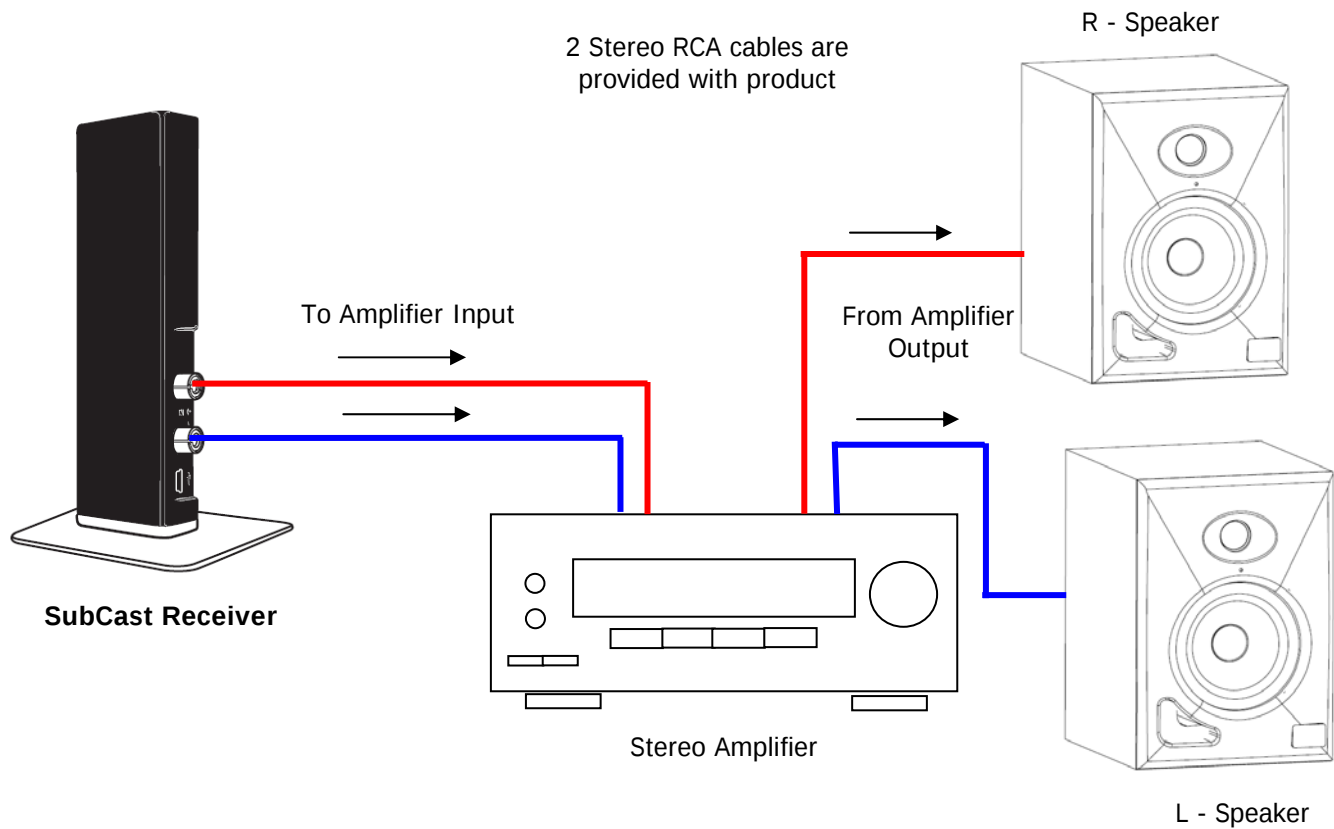

Stereo applications using the SubCast System

Application Diagram

SUBCAST-S#3

Using the SubCast System
with a computer as Audio
Source through the USB Port.

