


# Stereo applications using the SubCast System

## Application diagram


### SUBCAST-S#1

#### Using the SubCast System and 2 Powered Speakers

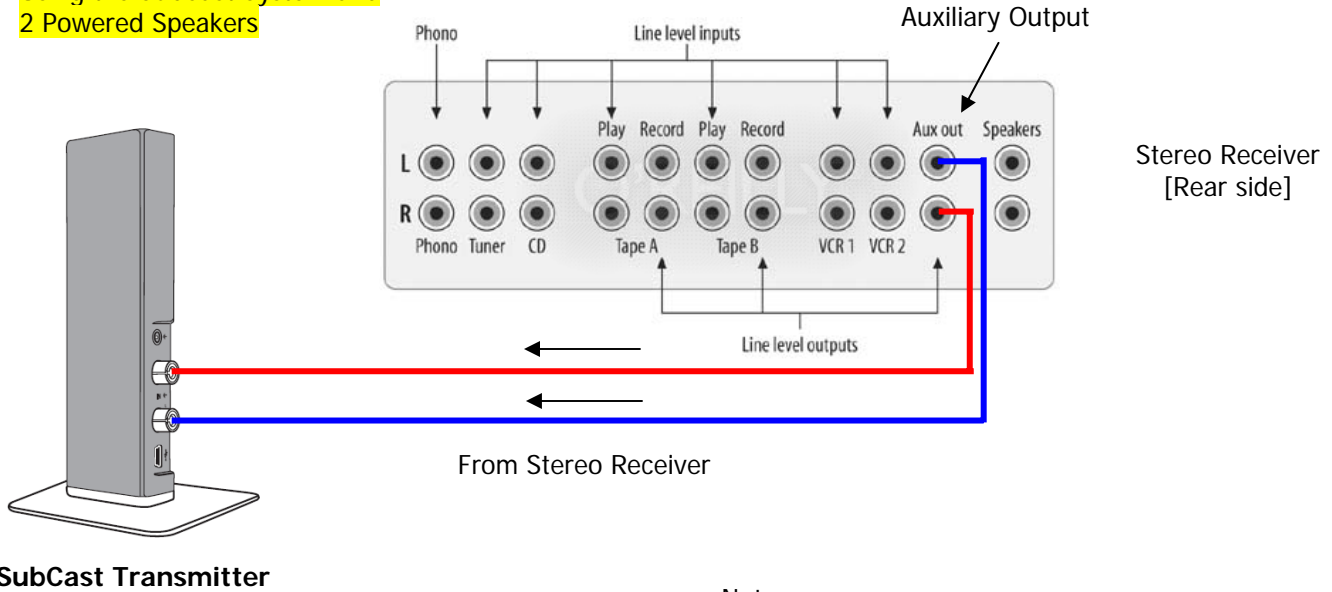

Note:

2 Stereo RCA cables are provided with product

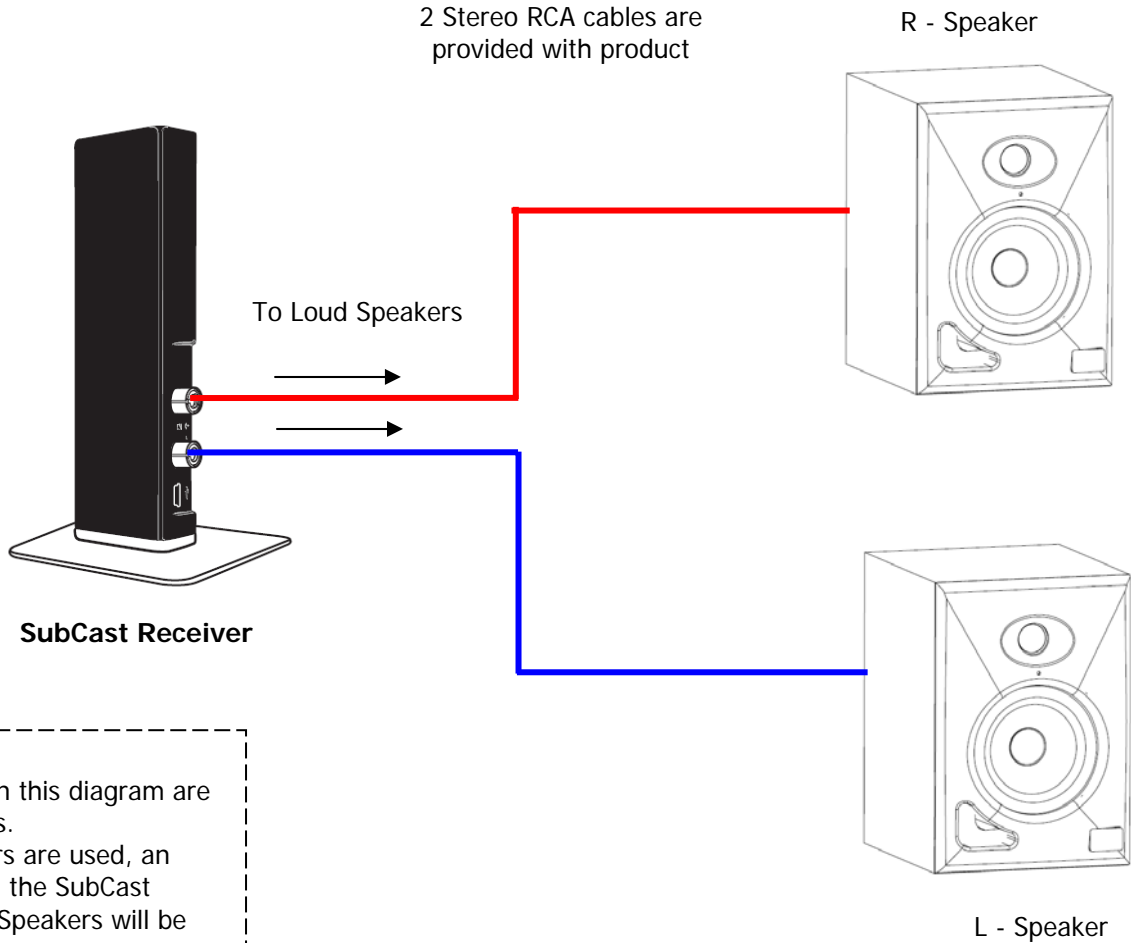


Note:  
Speakers shown in this diagram are Powered Speakers.  
If passive speakers are used, an amplifier between the SubCast Receiver and the Speakers will be required.

\* Drawing is not to scale

# Stereo applications using the SubCast System

## Application diagram SUBCAST-S#2


Using the SubCast System with an amplifier and 2 passive speakers at the receiver end.

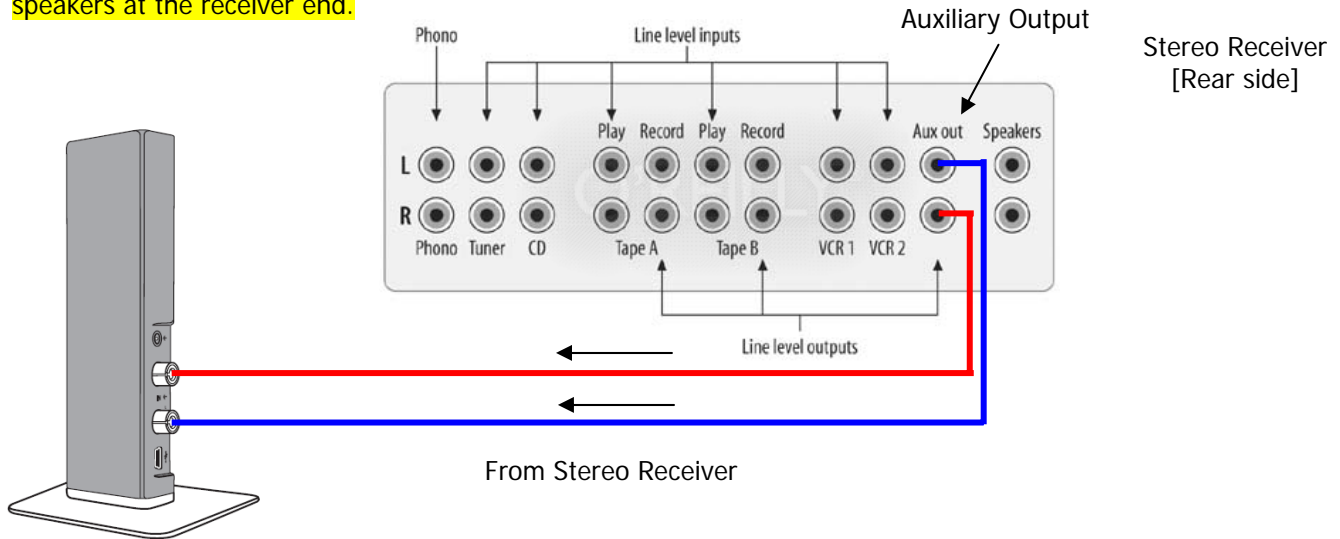

**SubCast Transmitter**

Note:

2 Stereo RCA cables are provided with product

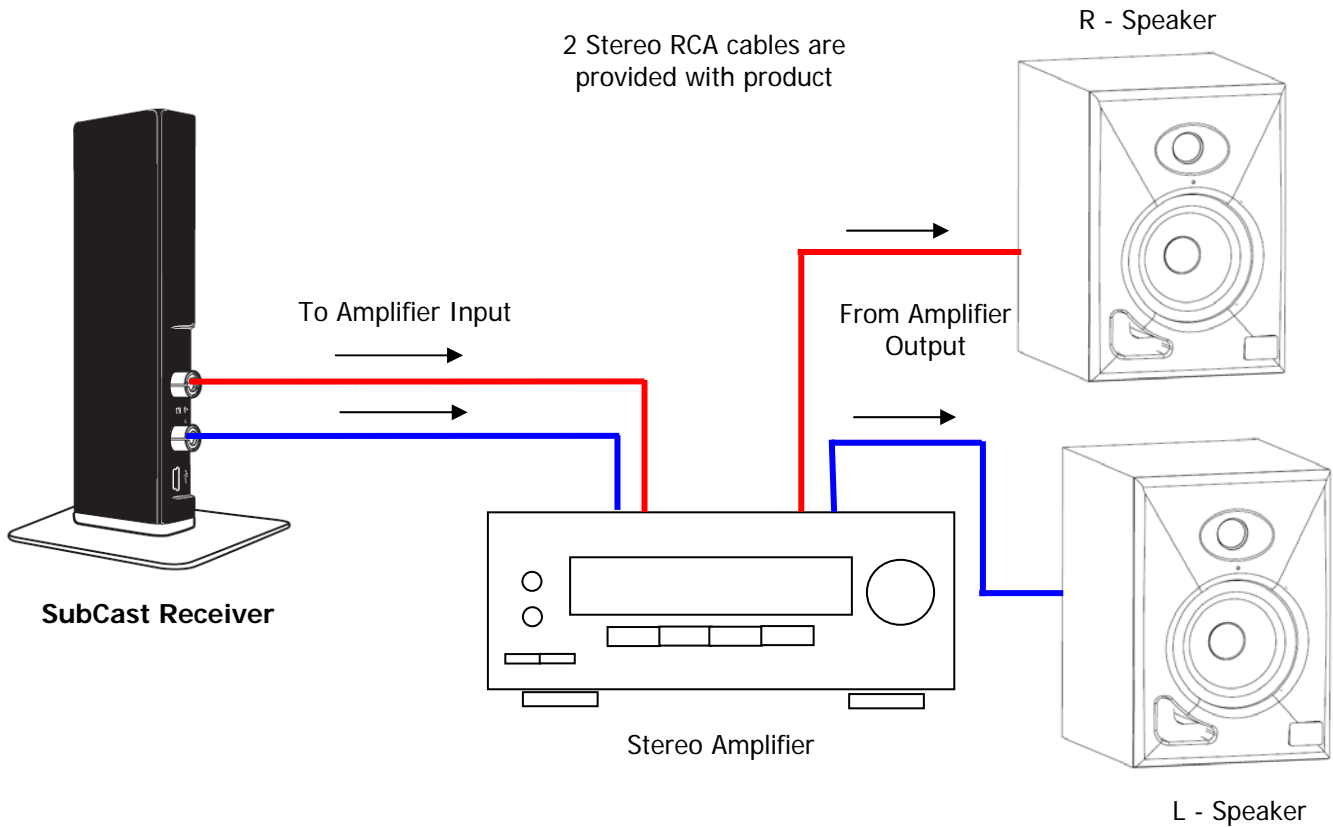


\* Drawing is not to scale

# Stereo applications using the SubCast System

## **Application Diagram**

### **SUBCAST-S#3**

Using the SubCast System  
with a computer as Audio  
Source through the USB Port.

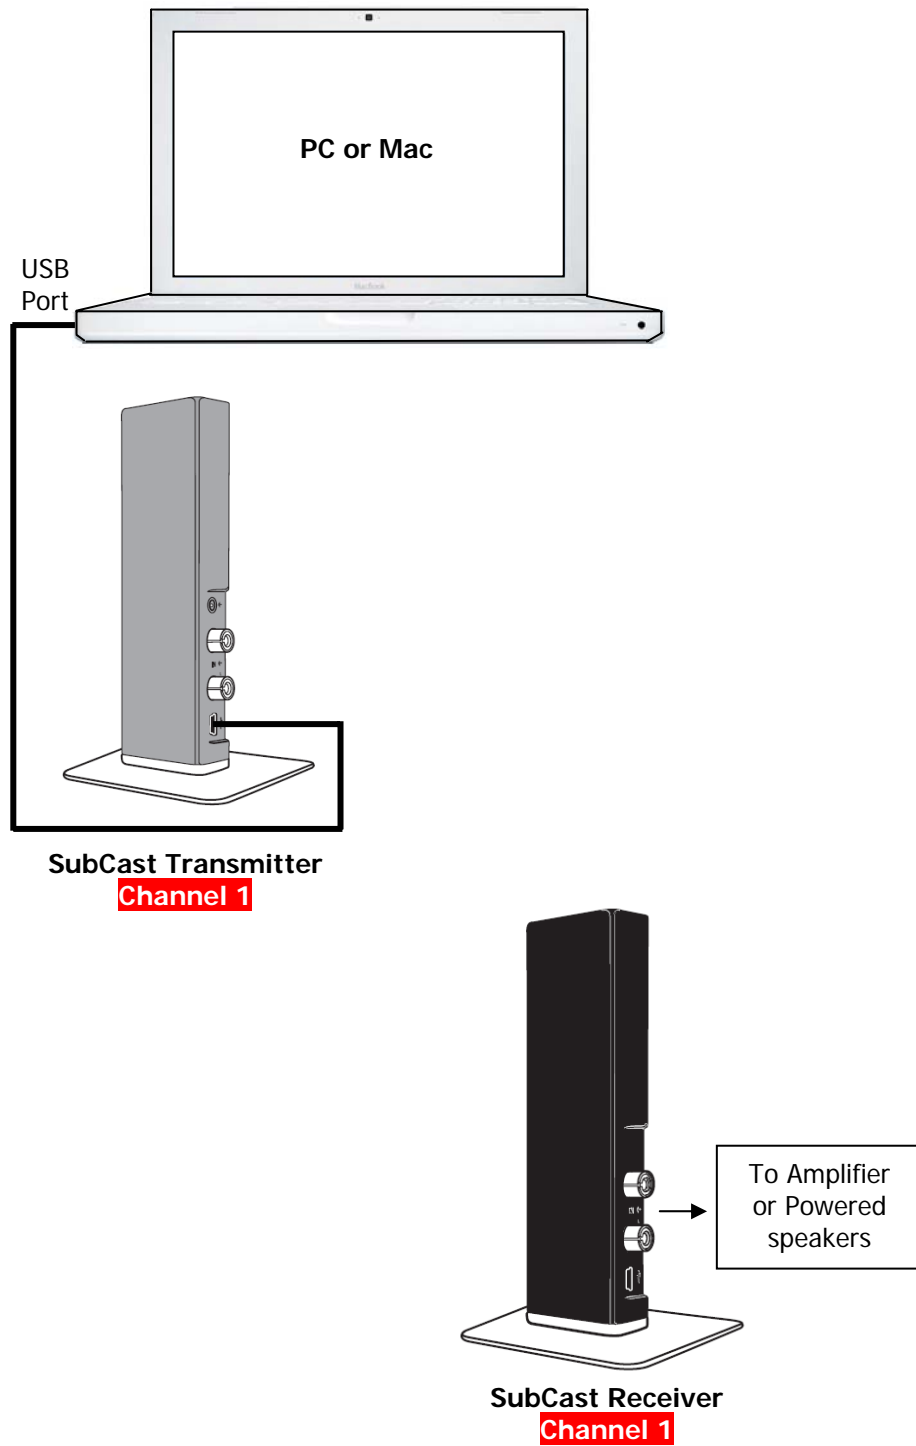

\* Drawing is not to scale